

260MRT

MINI ROUGH TERRAIN SCISSOR LIFT



**Standard Four-Wheel
Drive for Terrainability**





**Wider Arm Stack
for Improved Stability**



**Large, High Capacity
Work Platform**



JLG MODEL 260MRT

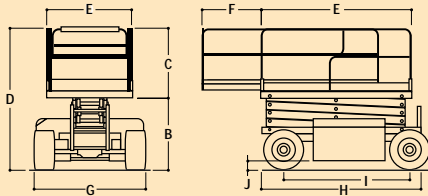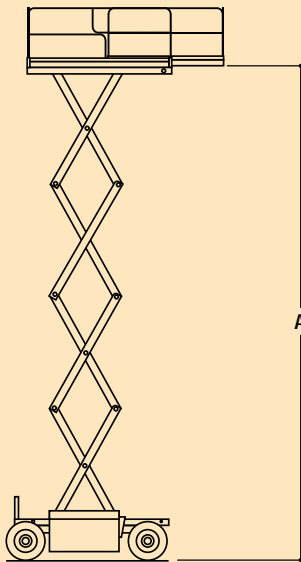

DIMENSIONAL DATA

A. Platform Height Elevated	7.92 m (26 ft.)
B. Platform Height Lowered	1.26 m (4 ft. 1.5 in.)
C. Platform Railing Height	1.10 m (3 ft. 7.5 in.)
D. Overall Height	2.37 m (7 ft. 9.5 in.)
E. Platform Size	1.65 x 2.59 m (65 x 102 in.)
F. Platform Extension	1.22 m (48 in.)
G. Overall Width	1.75 m (5 ft. 9 in.)
H. Overall Length (no outriggers)	2.67 m (8 ft. 9 in.)
I. Wheelbase	1.98 m (6 ft. 6 in.)
J. Ground Clearance	20 cm (8 in.)
Platform Capacity	570 kg (1,250 lbs.)
Capacity on Deck Extension	140 kg (300 lbs.)
Lift/Lower Speed	27/21 sec.
Maximum Drive Height	Full Height
Gross Vehicle Weight*	3,700 kg. (8,160 lbs)

CHASSIS

Drive Speed - Lowered	5.6 kph (3.5 mph)
Drive Speed - Elevated	0.6 kph (0.4 mph)
Gradeability	35%
Turning Radius (inside)	2.13 m (84 in.)
Tyre Size/Type	26 x 12 Lug Tread
Brakes	Spring Applied Hydraulically Released

POWER SYSTEM

Diesel Engine	Kubota 905	19.4 kW (26 hp)
Fuel Tank Capacity		28.4 L (7.5 gal.)
Hydraulic Reservoir		56.9 L (15 gal.)

*Certain options or country standards will increase weight.

PERFORMANCE FEATURES

Standard Features

- Four-Wheel Drive
- 1.65 x 2.59 m (65 x 102 in.) Steel Platform
- 1.22 m (4 ft.) Manual Roll-Out Deck Extension
- Fold-Down Platform Rails
- Removable Platform Control Box
- Proportional Hydrostatic Drive Control with Thumb Steer
- Proportional Lift Up
- 26 x 12 Foam Filled Tyres
- Horn
- Hourmeter
- 3 Degree Slope Alarm and Light
- Descent Alarm
- Lubrication-Free Scissor Arm Bushings

- Scissor Maintenance Prop
- Manual Descent Pull Cable
- Heavy Gauge Steel Chassis Hoods
- Brake and Motor Release for Low-Speed Towing
- Full Swing-Gate

Available Options

- Platform Work Lights
 - All Motion Alarm
 - Flashing Beacon
 - Alarm Package¹
 - Hydraulic Leveling Jacks
- ^{1.} Includes flashing beacon and all motion alarm

Big Performance in a Small Package

Only JLG can put this much performance in such a compact scissor lift. The 260MRT Mini Rough Terrain Scissor Lift delivers exceptional mobility on or off slab thanks to a narrow 1.75 m (69 in.) chassis that fits into tight spaces and standard four-wheel drive that travels 35% grades. Large deck space and large capacity are advantages that make a big difference in productivity!

Major Advantages

- Standard four-wheel drive with 35% gradeability
- Large, high-capacity operator work platform
- Wider, stronger armstack
- Simplified ground control wiring for ease of service

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67 and ANSI A92.6-1999 as originally manufactured for intended applications.

The JLG Promise

Whether you rent or own a JLG lift, you can expect the best in terms of safety, reliability, productivity and ease of use for the operator.



JLG Industries (Europe)

A Division of JLG Industries, Inc.
 Kilmartin Place, Tannochside Park,
 Uddingston, G71 5PH, Scotland
 Tel: 01698 811005
 Fax: 01698 811055
 Internet: <http://www.jlg.com>
 e-mail address: europa@jlg.com

lift-market.com
 UŻYWANE PODESTY RUCHOME
 office@lift-market.com

