

nifty

TM34T

TRAILER MOUNTED WORK PLATFORM



33ft 6in

Platform height

20ft

Working outreach

Telescopic Upper Boom

Greater accuracy when
positioning platform

Bi-Energy Available

Optimizing utilization

Hydraulic Outriggers

For quick & easy setup

**Fully Proportional
Hydraulic Controls**

Simple, reliable &
easy to maintain

Telescopic Axles

Access through double
doorway openings



niftylift.com



nifty TM34T

Designed specifically to give maximum performance from the most compact chassis possible, the Nifty **TM34T** utilizes its versatile telescopic boom to deliver unrivaled working outreach. Hydraulically operated outriggers make setting up quick and easy and the telescopic axles coupled with its compact base make this one of the most maneuverable trailer mounts available.

SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- Meets OSHA and ANSI regulations



The **TM34T's** telescopic boom provides outstanding working outreach especially at lower levels where it's needed most.

The **TM34T** is also available on low pressure, rough terrain tracks (**TD34T**).




SPECIFICATIONS

Working Height	40ft	12.20m
Platform Height	33ft 6in	10.20m
Working Outreach	20ft	6.10m
Slew	360°	
Width - Travelling	4ft 11in	1.50m
- Working	11ft 8in	3.55m
- Axles Retracted*	3ft 7in	1.10m
Height	6ft 3in	1.90m
Length	14ft 9in	4.50m
Weight	3,100lbs**	1,400kg**
Platform Capacity	500lbs	226kg
Platform Size	3ft 7in x 2ft 2in	1.10m x 0.65m
Control System	Fully Proportional Hydraulic	
Power System	Mains Only Battery Only Gas or Diesel Only Bi-Energy (Engine & Battery)	
Drive Options	Traction Drive	

* Traction drive axles do not retract.

** Weights may vary according to specification / power options, please confirm before ordering.

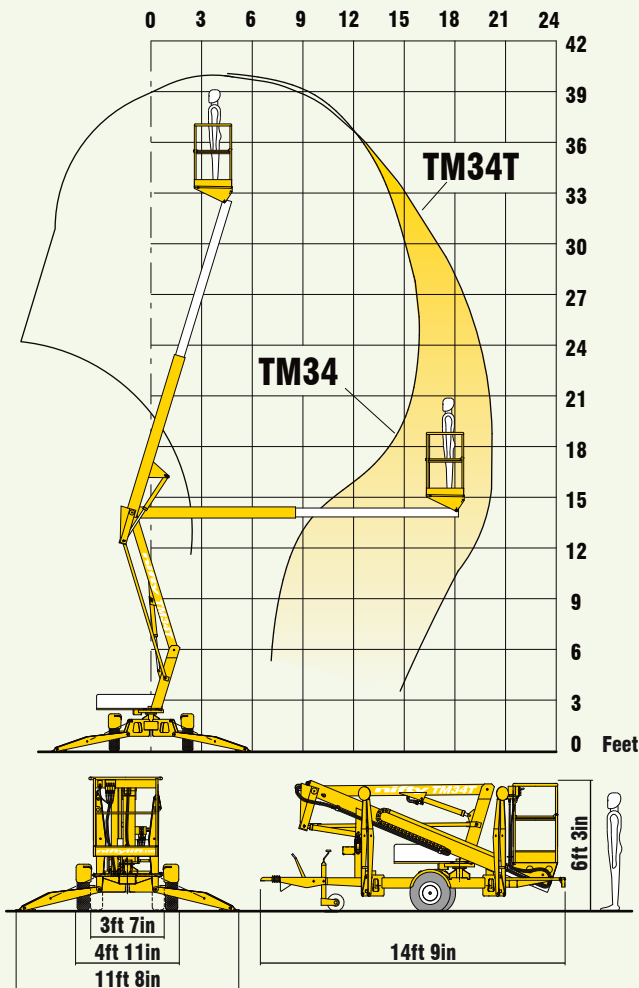

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

NIFTYLIFT INC

32 Concourse Way,
Greer, SC 29650 USA
Sales: 1-800-NIFTYLIFT (800-643-8954)
Office: 1-877-MYNIFTY (877-696-4389)
Fax: 1-864-968-8836
e.mail: info@niftylift.com
www.niftylift.com

NIFTYLIFT LTD

Fingle Drive, Stonebridge
Milton Keynes, MK13 0ER
England, United Kingdom
Tel.: +44 (0)1908 223456
Fax.: +44 (0)1908 312733
e.mail: info@niftylift.com
www.niftylift.com